




Pulsa C6 Pins

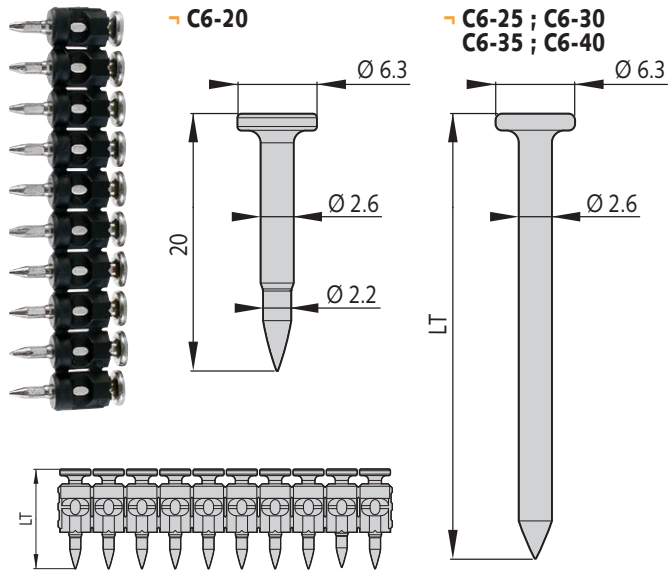

Description

→ For drywall track and wiring accessories

Material properties

Carbon steel shank

- Total length Lt : 20, 25, 30, 35 or 40mm
- Electrogalvanised, min zinc coating 5 µm

Tools

Pulsa 700E & Pulsa 700P

Approvals


CSTB Technical approval 3/06 - 460

Nail length selection

C6 range	Length (LT)	Eurocode Black strip 500 pcs/box	Eurocode Flush head range* 500 pcs/box
C6-20	20	046310	011225
C6-25	25	046320	011853
C6-30	30	046330	011860
C6-35	35	046340	-
C6-40	40	-	046350

* Leaves no plastic residue after fixing

Recommended spacing

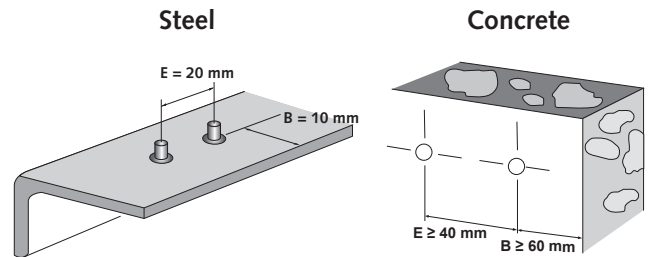

B = the minimum distance from the edge
E = the minimum space between two fixings

Recommended loads

C6 range		Characteristic resistance		Recommended load	
		N_{Rk} (kN)	V_{Rk} (kN)	N_{Rec} (kN)	V_{Rec} (kN)
 C20/25 to C30/37	$H_{nom} = 20mm$	1.41	0.75	0.10	0.10