




Pulsa CG6 & HCG6 Pins

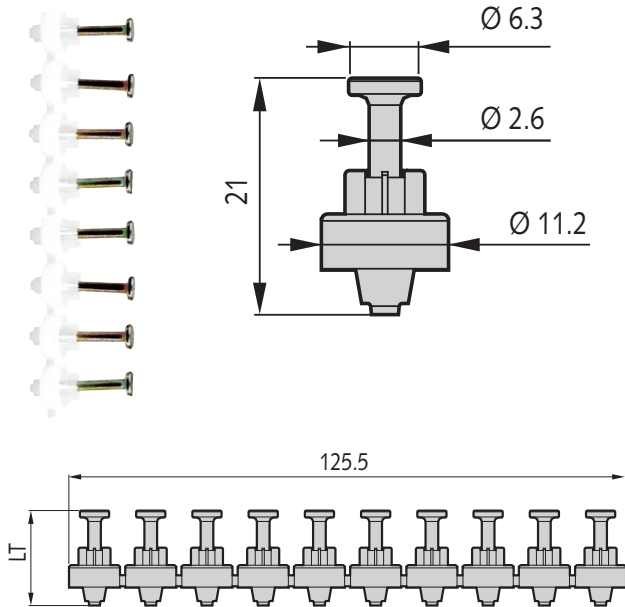

Description

- For PVC-U trunking
- The patented energy absorber design eliminates damage to the trunking and prevents deformation
- The head of the nail is designed to countersink into the washer stopping contact between the metal nail head and cabling

Material properties

Carbon steel shank

- Total length Lt : 20, 25, 30, 35mm
- Electrogalvanised, min zinc coating 5 µm

Tools


Pulsa 700E

Nail length selection

CG6 range	Length (LT)	Eurocode White strip 500 pcs/box
HCG6-15	15	011210
CG6-20	20	046610
CG6-25	25	046620
CG6-30	30	011211
CG6-35	35	011212

* Leaves no plastic residue after fixing

Recommended spacing

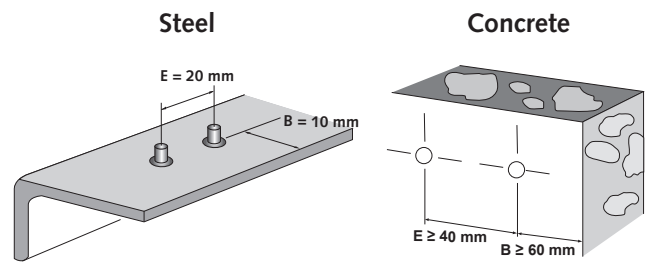

B = the minimum distance from the edge
E = the minimum space between two fixings

Recommended loads

C6 range		Characteristic resistance		Recommended load	
		N_{Rk} (kN)	V_{Rk} (kN)	N_{Rec} (kN)	V_{Rec} (kN)
 C20/25 to C30/37	$H_{nom} = 20mm$	1.41	0.75	0.10	0.10

Edge and distance spacing

Base material	Minimum edge distance C	Minimum spacing distance S
Concrete	60	40
Prestressed / Prefabricated Concrete	40	30